


Membrane Housing Specification Chart

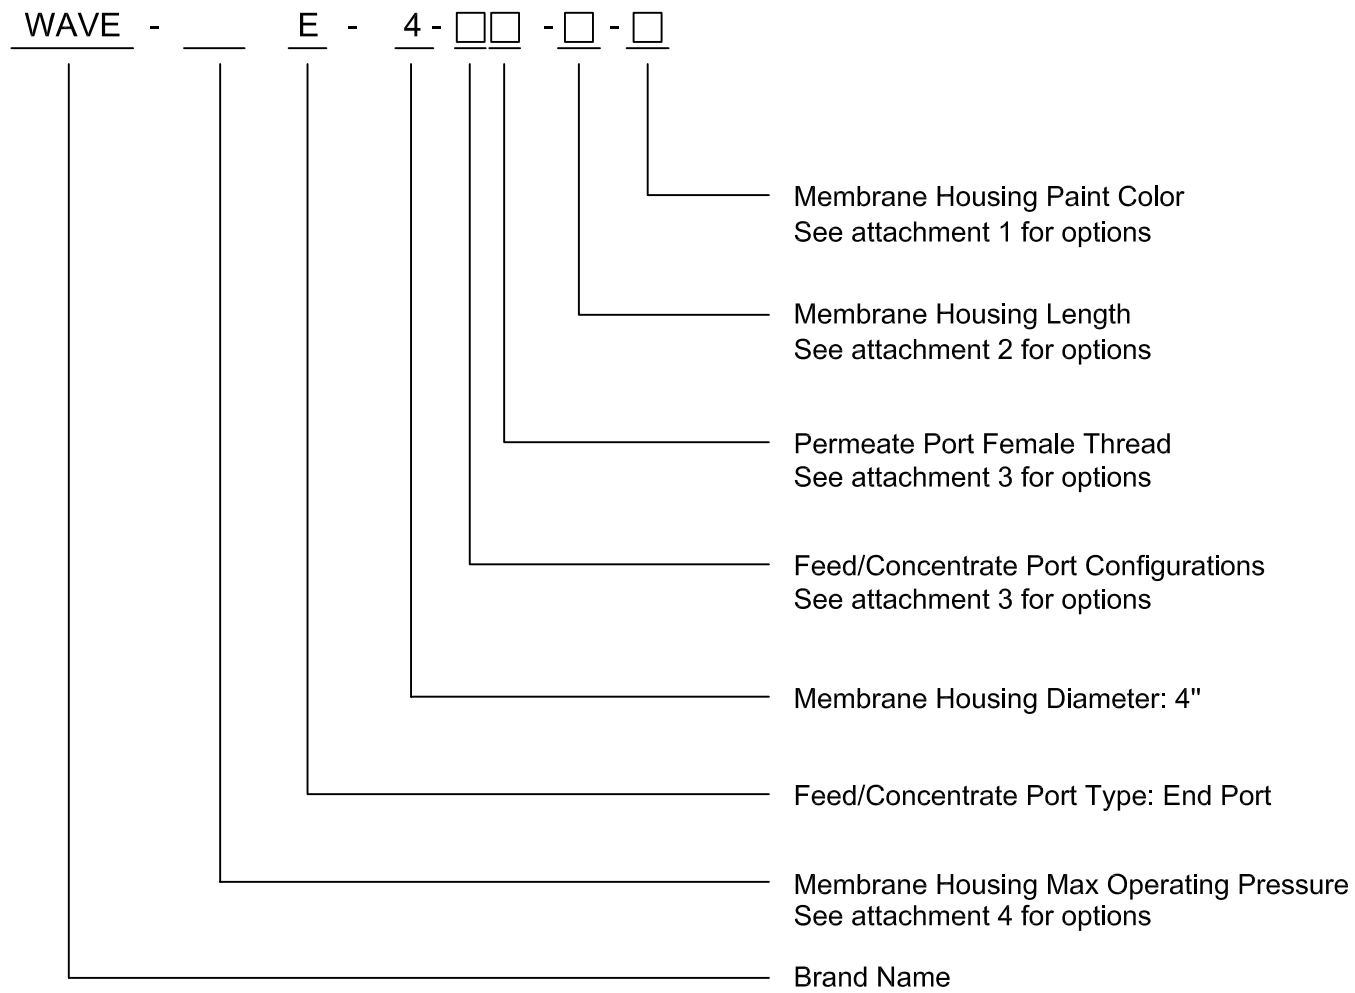

Attachment 1: Membrane Housing Paint Color Options

	White	Blue
Code	WH	BL

Attachment 2: Membrane Housing Length Options

F (Dash)	1	2	3	4	5	6
Code	1	2	3	4	5	6

Attachment 4: Membrane Housing Max Operating Pressure Options

	300Psi	450Psi	1000Psi
Code	300	450	1000

Odering:


Model: _____

Quantity: _____

Contact Person: _____

Contact: _____

Attachment 3: 4" Permeate port thread type options:

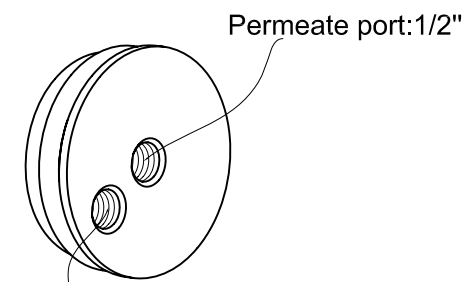

Feed/Concentrate port: 1/2"


Feed/Concentrate port female thread options:

	1/2"NPT	1/2"BSPP	1/2"BSPT	1/2"BSPP(Face Seal)
Code	A	C	E	G

Permeate port female thread options:

	1/2"NPT	1/2"BSPP	1/2"BSPT	1/2"BSPP(Face Seal)
Code	P	R	S	T

Thread combination options: AP, CR, ES, GT

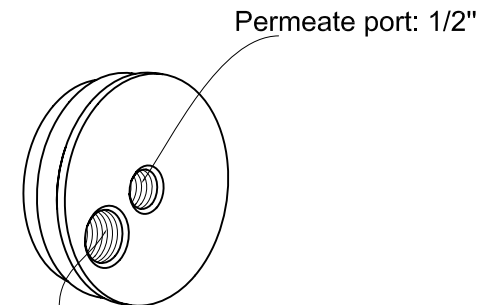

Feed/Concentrate port: 3/4"

Feed/Concentrate port female thread options:

	3/4"NPT	3/4"BSPP	3/4"BSPT	3/4"BSPP(Face Seal)
Code	B	D	F	H

Permeate port female thread options:


	1/2"NPT	1/2"BSPP	1/2"BSPT	1/2"BSPP(Face Seal)
Code	P	R	S	T

Thread combination options: BP, DR, FS, HT

* Note: If the thread standard or thread combination you are using is not listed in attachment 3, please contact our customer service.

EXAMPLE

This example is provided to show you the proper way to specify your port locations. Please understand this example before filling out the ordering page. For questions concerning the use of this chart, please call the factory.

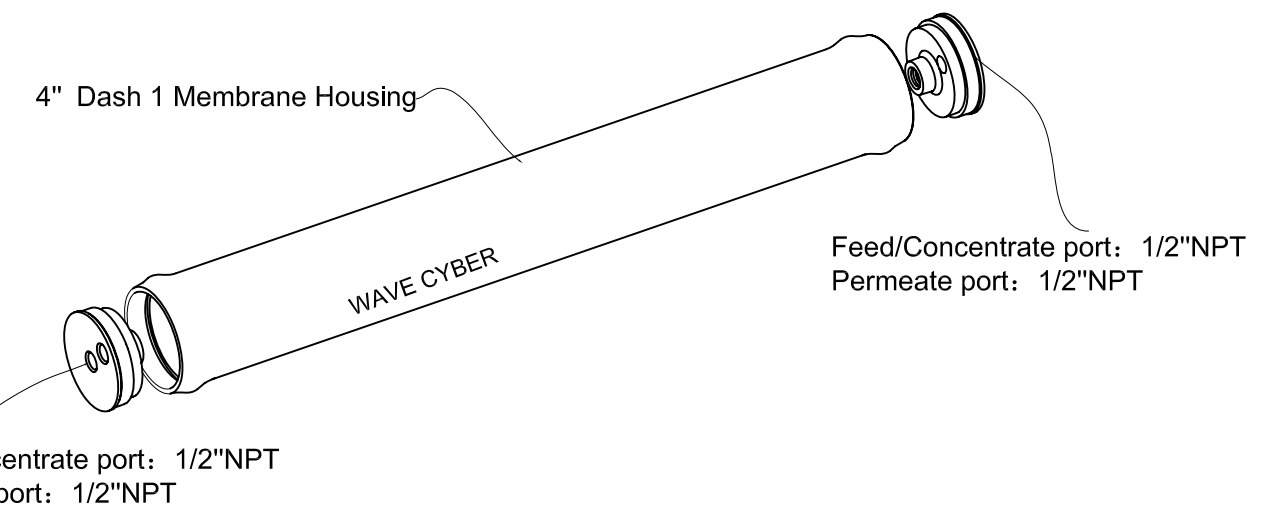

Standard model: WAVE-300E-4-AP-1-WH--4", 300PSI End port, Feed/Concentrate port thread: 1/2"NPT Female thread. Permeate port thread: 1/2"NPT, Dash 1, White paint.